










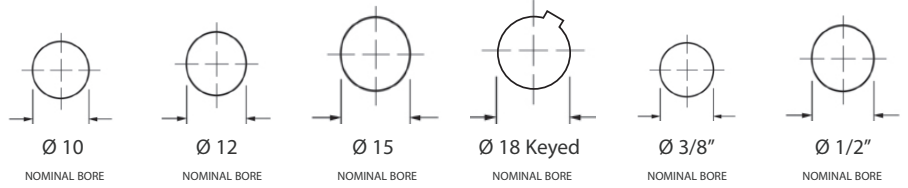











125mm Rotacasters

Product Catalogue



125mm Rotacaster




WHEELS	BUSH/BEARING	PART NUMBER					
 <p>R2 Durometer (Hardness) 85A Capacity (Lateral/Static) 57/115 Kg</p>	 Plain	--	--	--	R2-1258-8518	--	--
	 Nylon	R2-1258-85/N10	R2-1258-85/N12	--	--	--	R2-1258-85/N13
	 Shielded	R2-1258-85/Z10	--	--	--	R2-1258-85/Z09	--
	 Sealed	R2-1258-85/S10	R2-1258-85/S12	R2-1258-85/S15	--	--	R2-1258-85/S13
 <p>R2 Durometer (Hardness) 95A Capacity (Lateral/Static) 68/125 Kg</p>	 Plain	--	--	--	R2-1258-9518	--	--
	 Nylon	R2-1258-95/N10	R2-1258-95/N12	--	--	--	R2-1258-95/N13
	 Shielded	R2-1258-95/Z10	--	--	--	R2-1258-95/Z09	--
	 Sealed	R2-1258-95/S10	R2-1258-95/S12	R2-1258-95/S15	--	--	R2-1258-95/S13
 <p>R3 Durometer (Hardness) 85A Capacity (Lateral/Static) 80/130 Kg</p>	 Plain	--	--	--	R3-1258-8518	--	--
	 Nylon	R3-1258-85/N10	R3-1258-85/N12	--	--	--	R3-1258-85/N13
	 Shielded	R3-1258-85/Z10	--	--	--	R3-1258-85/Z09	--
	 Sealed	R3-1258-85/S10	R3-1258-85/S12	R3-1258-85/S15	--	--	R3-1258-85/S13
 <p>R3 Durometer (Hardness) 95A Capacity (Lateral/Static) 80/160 Kg</p>	 Plain	--	--	--	R3-1258-9518	--	--
	 Nylon	R3-1258-85/N10	R3-1258-95/N12	--	--	--	R3-1258-95/N13
	 Shielded	R3-1258-95/Z10	--	--	--	R3-1258-95/Z09	--
	 Sealed	R3-1258-95/S10	R3-1258-95/S12	R3-1258-95/S15	--	--	R3-1258-95/S13

Load Capacity Notes:

■ Lateral Load Capacity refers to the maximum load capacity of each wheel to travel directly sideways without radial head contact. ■ The Dynamic Load Capacity (while in motion) ranges between the maximum Static and the Lateral Load Capacity and varies proportionally to speed of the wheel travelling in its primary direction.

Wheel Dimensions (in mm)




Weight:
Double: 0.315kg
Triple: 0.485kg

R2



R3

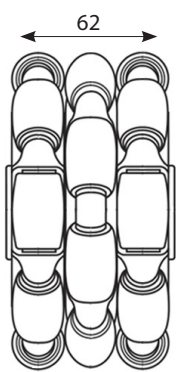

Conversion

Metric	Imperial
3.2mm	1/8"
6.35mm	1/4"
8.00mm	5/16"
9.53mm	3/8"
11.1mm	7/16"
12.7mm	1/2"
15.88mm	5/8"
25.4mm	1"

125mm Rotacaster Single Mounts

STEEL FORKS (ZINC PLATED)

R2 Formed



DUROMETER


PART NUMBER (Lateral / Static Load Capacity)

85A

R2-1258-85/MF
57/115 Kg

95A

R2-1258-95/MF
68/125 Kg

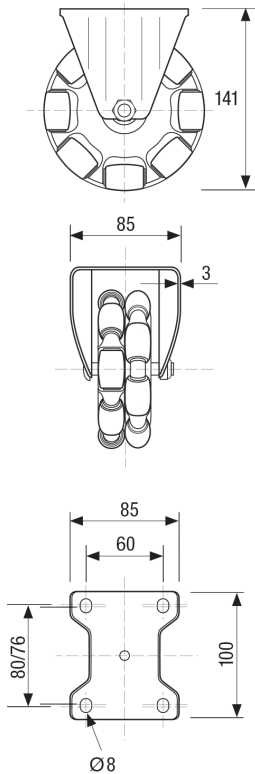


R4 Formed



PART NUMBER (Lateral / Static Load Capacity)

R4-1258-85/MF
120/200 Kg

R4-1258-95/MF
120/220 Kg

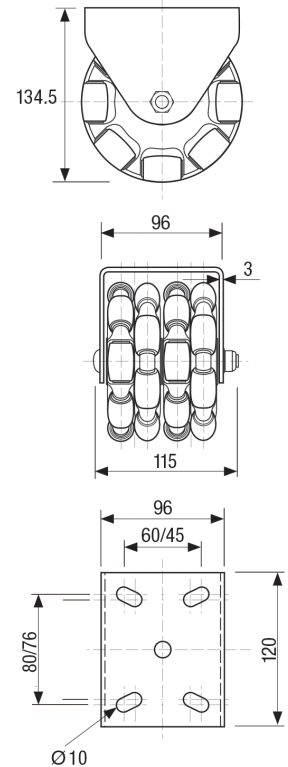


Load Capacity Notes:

■ Lateral Load Capacity refers to the maximum load capacity of each wheel to travel directly sideways without radial head contact. ■ The Dynamic Load Capacity (while in motion) ranges between the maximum Static and the Lateral Load Capacity and varies proportionally to speed of the wheel travelling in its primary direction.

FLOOR LOCKS

Friction Pad Floor Lock 11-9003

Mounting height: 132mm
Load capacity: 770kg



Lift Up Floor Lock 11-9002

Mounting height: 142mm
Load capacity: 200kg

